


**Tee con rosca central hembra**

| Código  | d  |   | F   | D  | D1 | p  | L  | L1 | Peso |
|---------|----|---|-----|----|----|----|----|----|------|
| 2000166 | 20 | x | 1/2 | 29 | 37 | 16 | 54 | 33 | 71   |
| 2000167 | 25 | x | 1/2 | 33 | 43 | 18 | 63 | 39 | 85   |
| 2000168 | 25 | x | 3/4 | 33 | 43 | 18 | 63 | 39 | 105  |
| 2000170 | 32 | x | 1/2 | 42 | 54 | 20 | 74 | 44 | 127  |
| 2000171 | 32 | x | 3/4 | 42 | 54 | 20 | 74 | 44 | 149  |
| 2000169 | 32 | x | 1   | 42 | 54 | 20 | 74 | 44 | 180  |

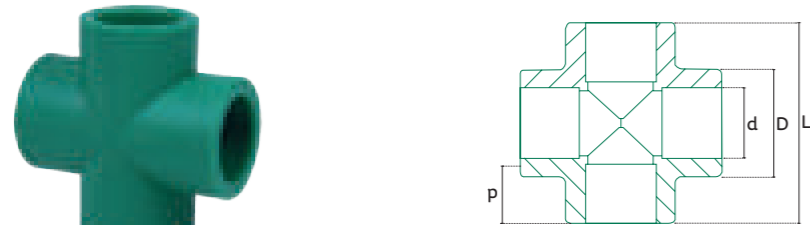

**Cruz**


| Código | d  | D  | p  | L  | Peso |
|--------|----|----|----|----|------|
| 200082 | 20 | 27 | 16 | 54 | 20   |

**Conectores rectos**



**Conector macho**


| Código | d  |   | f     | D   | D1  | p  | L   | H  | E  | Peso |
|--------|----|---|-------|-----|-----|----|-----|----|----|------|
| 200051 | 20 | x | 1/2   | 27  | 38  | 16 | 53  | 12 |    | 95   |
| 200052 | 20 | x | 3/4   | 32  | 41  | 17 | 60  | 18 |    | 150  |
| 200053 | 25 | x | 1/2   | 36  | 41  | 17 | 62  | 15 |    | 106  |
| 200054 | 25 | x | 3/4   | 36  | 41  | 17 | 65  | 18 |    | 148  |
| 200056 | 32 | x | 3/4   | 43  | 48  | 19 | 73  | 18 |    | 180  |
| 200055 | 32 | x | 1     | 43  | 48  | 19 | 75  | 20 |    | 270  |
| 200057 | 40 | x | 1 1/4 | 53  | 66  | 21 | 92  | 20 | 22 | 510  |
| 200058 | 50 | x | 1 1/2 | 58  | 74  | 24 | 97  | 22 | 20 | 585  |
| 200059 | 63 | x | 2     | 78  | 85  | 29 | 102 | 20 | 22 | 744  |
| 200060 | 75 | x | 2 1/2 | 100 | 109 | 31 | 108 | 21 | 77 | 1926 |
| 200061 | 90 | x | 3     | 120 | 128 | 34 | 115 | 27 | 90 | 1503 |

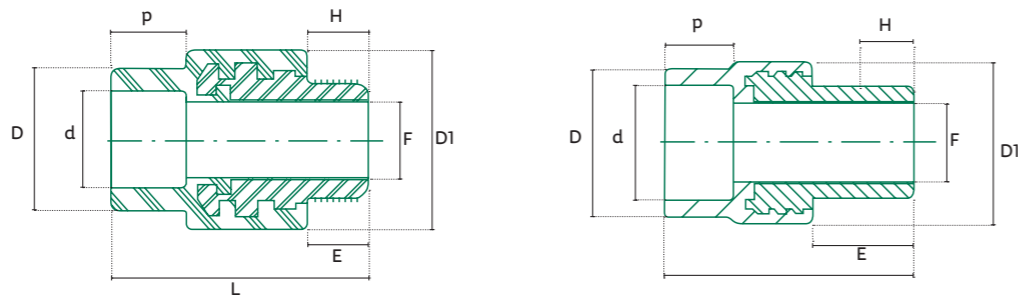

Referencias: peso de las conexiones en gramos; dimensiones en mm.


**Conector hembra**

| Código | d  |   | F     | D   | D1  | p  | L  | H  | E  | Peso |
|--------|----|---|-------|-----|-----|----|----|----|----|------|
| 200039 | 20 | x | 1/2   | 27  | 41  | 16 | 53 | 12 |    | 59   |
| 200040 | 20 | x | 3/4   | 32  | 41  | 17 | 42 | 16 |    | 96   |
| 200041 | 25 | x | 1/2   | 36  | 41  | 17 | 47 | 12 |    | 69   |
| 200042 | 25 | x | 3/4   | 36  | 41  | 17 | 47 | 16 |    | 94   |
| 200044 | 32 | x | 3/4   | 43  | 47  | 19 | 55 | 17 |    | 125  |
| 200043 | 32 | x | 1     | 43  | 48  | 19 | 55 | 17 |    | 157  |
| 200045 | 40 | x | 1 1/4 | 53  | 67  | 21 | 70 | 22 | 20 | 408  |
| 200046 | 50 | x | 1 1/2 | 64  | 73  | 25 | 75 | 24 | 20 | 481  |
| 200047 | 63 | x | 2     | 78  | 85  | 29 | 80 | 24 | 20 | 613  |
| 200048 | 75 | x | 2 1/2 | 100 | 109 | 31 | 84 | 22 | 82 | 945  |
| 200049 | 90 | x | 3     | 120 | 128 | 34 | 91 | 25 | 95 | 1204 |

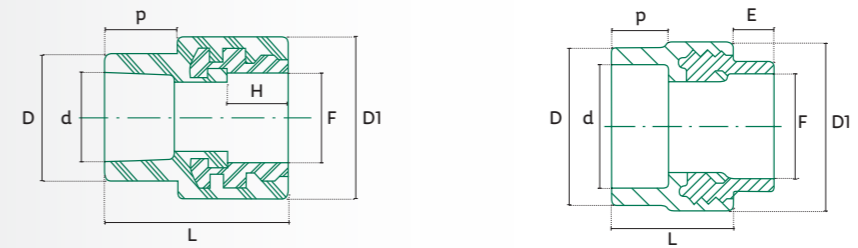


**Conector macho con espiga para termofusión**

| Código | d  |   | F   | D  | D1 | p  | L  | H  | Peso |
|--------|----|---|-----|----|----|----|----|----|------|
| 200062 | 20 | x | 1/2 | 20 | 38 | 16 | 53 | 12 | 94   |

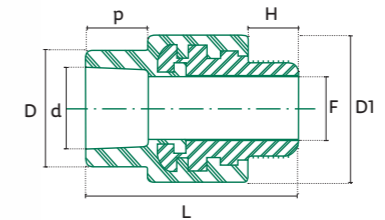

**Conector hembra con espiga para termofusión**

| Código | d  |   | F   | D  | D1 | p  | L  | H  | Peso |
|--------|----|---|-----|----|----|----|----|----|------|
| 200050 | 20 | x | 1/2 | 20 | 38 | 16 | 53 | 12 | 58   |

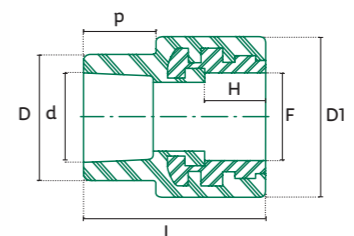

Referencias: peso de las conexiones en gramos; dimensiones en mm.